

# ASSEMBLED STRAIGHT AXLE CUSTOM WORK

Name: \_\_\_\_\_

Order # \_\_\_\_\_

ATM: \_\_\_\_\_ kg

[ T ] Tip-to-Tip = \_\_\_\_\_ mm

[ TC ] Tyre Clearance = \_\_\_\_\_ mm


[ P ] Axle Profile = \_\_\_\_\_ mm

[ F ] Face-to-Face = \_\_\_\_\_ mm

[ B ] Rim Backspace = \_\_\_\_\_ mm

**ROUND or SQUARE**

[ C ] Outside Chassis = \_\_\_\_\_ mm

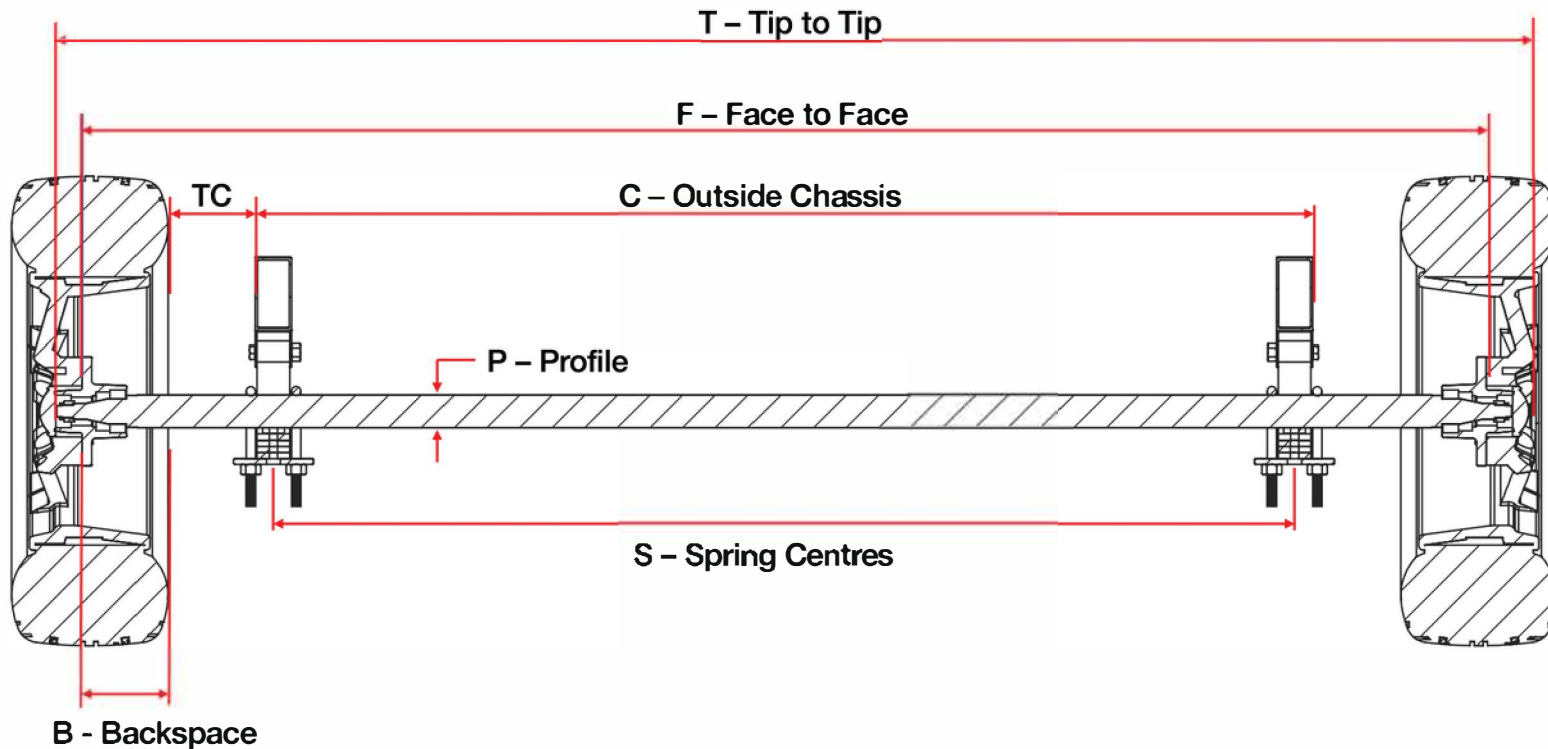

[ S ] Spring Centres = \_\_\_\_\_ mm

**TOP or BOTTOM**

If you want the Axle Pads welded to your axle, please specify:

*Diagram has the axle pads on the bottom of the axle.*